


# FSL-310 Electric Strike Datasheet

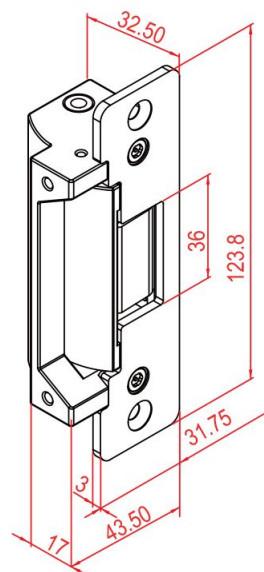

FSL-310

## Features

- Changeable between fail-safe and fail-secure
- Long life solenoid
- Max. latch throw: 15mm
- 12~24Vdc operating voltage


## Specifications

- Operating voltage: 12~24Vdc
- Current draw: 280mA/12Vdc; 140mA/24Vdc
- Reed switch rating: 1A/125Vac
- Operating Temperature: -10~+45degC
- Humidity: 0~95% non-condensing
- Up to 1,000,000 cycles test


## Wiring Diagram

### Dual Voltage (12/24VDC)

For the 12 VDC operation, the electric strikes have to connect in parallel.

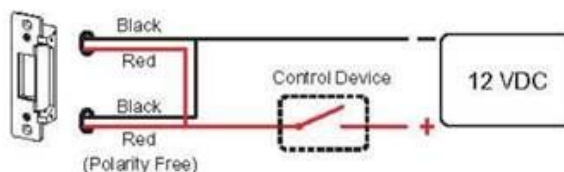

For the 24 VDC operation, the electric strikes have to connect in series.

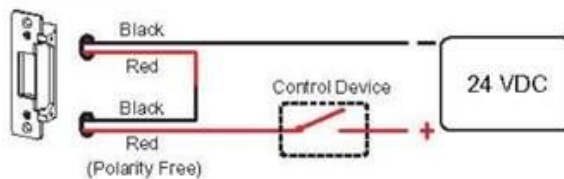

### HEAD OFFICE

U1, 37-39 Green St.  
Banksmeadow, NSW. 2019  
p. 61 2 9700 1700  
f. 61 2 9700 1955  
sales@fermaxaus.com.au

### QLD OFFICE

U11, 8 Fortitude Cres.  
Burlleigh Heads, QLD. 4220  
p. 61 7 5520 2266  
f. 61 7 5520 4591  
qld@fermaxaus.com.au

### VIC OFFICE

U30, 640-680 Geelong Rd.  
Brooklyn, VIC. 3012  
p. 61 3 9314 2220  
f. 61 3 9314 7772  
vic@fermaxaus.com.au

### WA OFFICE

PO Box 587  
Balcatta. 6914  
m. 0438 700 101  
wa@fermaxaus.com.au

### NZ OFFICE

PO Box 112 110  
Penrose. 1642  
m. 64 27 566 0222  
p. 64 9 337 6229  
nz@fermaxnz.co.nz