


REF.9533/9534 1/W VIDEO MEET PANEL

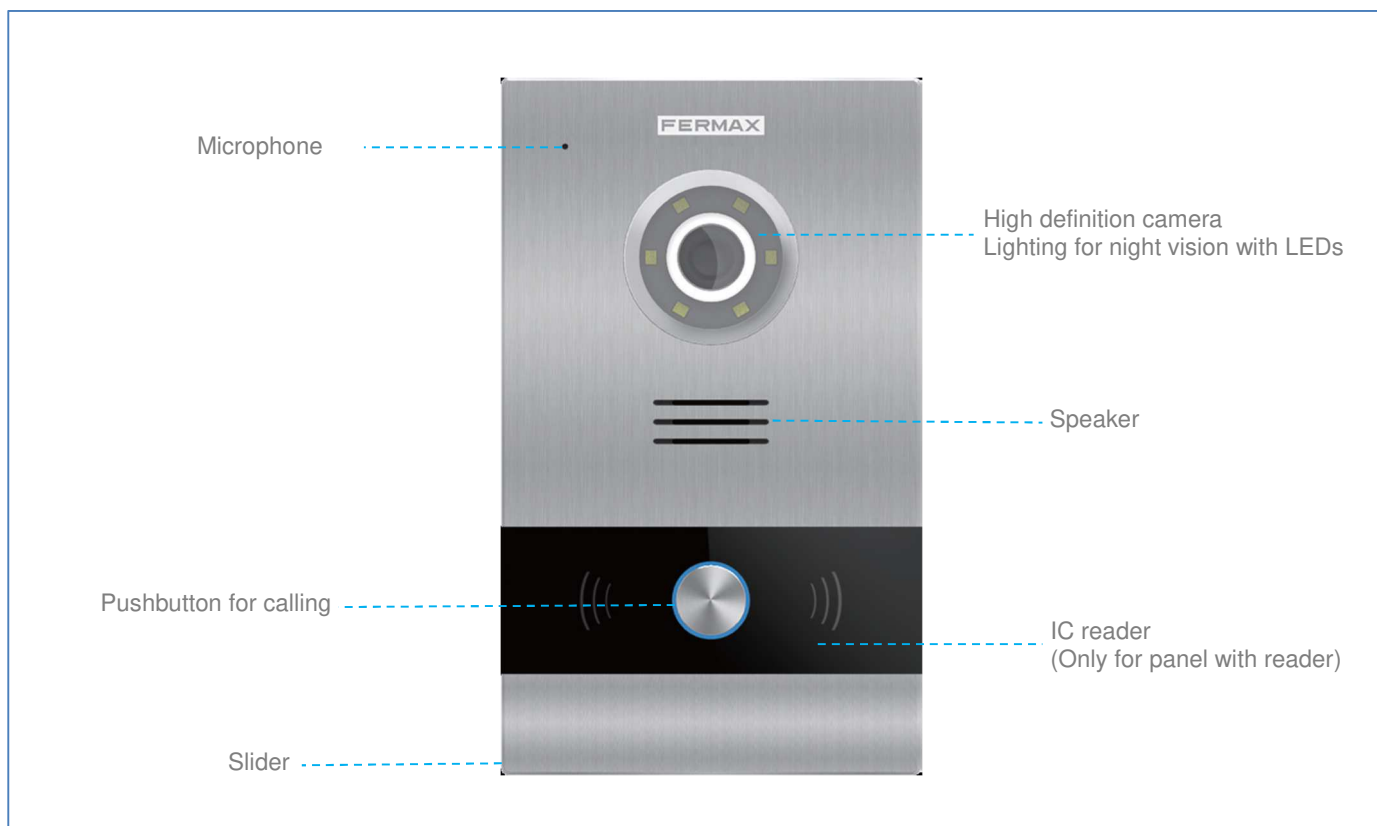

1/W VIDEO MEET PANEL is presented in two different versions: one version with IC reader, the other one without reader.

FEATURES

- Aluminum Profile
- High Resistance Tempered Glass
- High Definition Colour Camera
- Low Power Consumption
- Wide Range Working Environment
- Linux Modular Structure
- Access Control Integrated (Only for Panel with Reader)
- Available In 10 Languages
- Remote Firmware Update

FUNCTIONS

CALL TENANT

Visitors are able to call the desired tenant from 1L panel. Alternatively, it can be configured to call one guard unit acting as an emergency call panel.

REFERENCES

- Ref. 9533 1/W VIDEO MEET PANEL
- Ref. 9534 1/W VIDEO MEET PANEL (+ PROXIMITY)
- Ref. 9543 MEET PANEL FLUSH BOX – S

HEAD OFFICE

U1, 37-39 Green St,
Banksmeadow, NSW. 2019
p. 61 2 9700 1700
f. 61 2 9700 1955
sales@fermaxaus.com.au

QLD OFFICE

U11, 8 Fortitude Cres,
Burlleigh Heads, QLD. 4220
p. 61 7 5520 2266
f. 61 7 5520 4591
qld@fermaxaus.com.au

VIC OFFICE

U30, 640-680 Geelong Rd,
Brooklyn, VIC. 3012
p. 61 3 9314 2220
f. 61 3 9314 7772
vic@fermaxaus.com.au

WA OFFICE

U2, 26 Gibberd Rd,
Balcatta, 6914
p. 61 8 9240 2624
wa@fermaxaus.com.au

NZ OFFICE

PO Box 112 110
Penrose, 1642
m. 64 27 566 0222
p. 64 9 337 6229
nz@fermaxnz.co.nz

TECHNICAL SPECIFICATIONS

System:

- CPU: ARM Cortex-A7 1.2GHz
- FLASH: 128M
- SDRAM: 64M

Audio Features:

- G.711 protocol
- Audio level 17.7 dB

Camera:

- 1/3" CMOS Color
- 90° visual angle: Vertical 72°, Horizontal 54°
- 1.3 Mega Pixels
- Minimum illumination 0.5 LUX
- AWB

LED:

- White LED
- LM 60 mA Min. 24, Typ. 26
- View Angle 2θ1/2: 120

Power Consumption:

- On standby: 125mA
- Working: 250mA

Working voltage:

- 12 VDC


Connectivity:

- Ethernet RJ-45 Connector
- Exit button and door sensor connection
- NO, C, NC: Door lock release connection
- Built in web server for configuration and remote management

Working Environment:

- Temperature: -10 °C – 70 °C
- Humidity: 20 – 80% (Non-condensing)
- IP 54
- IK 07

DIMENSIONS (mm)

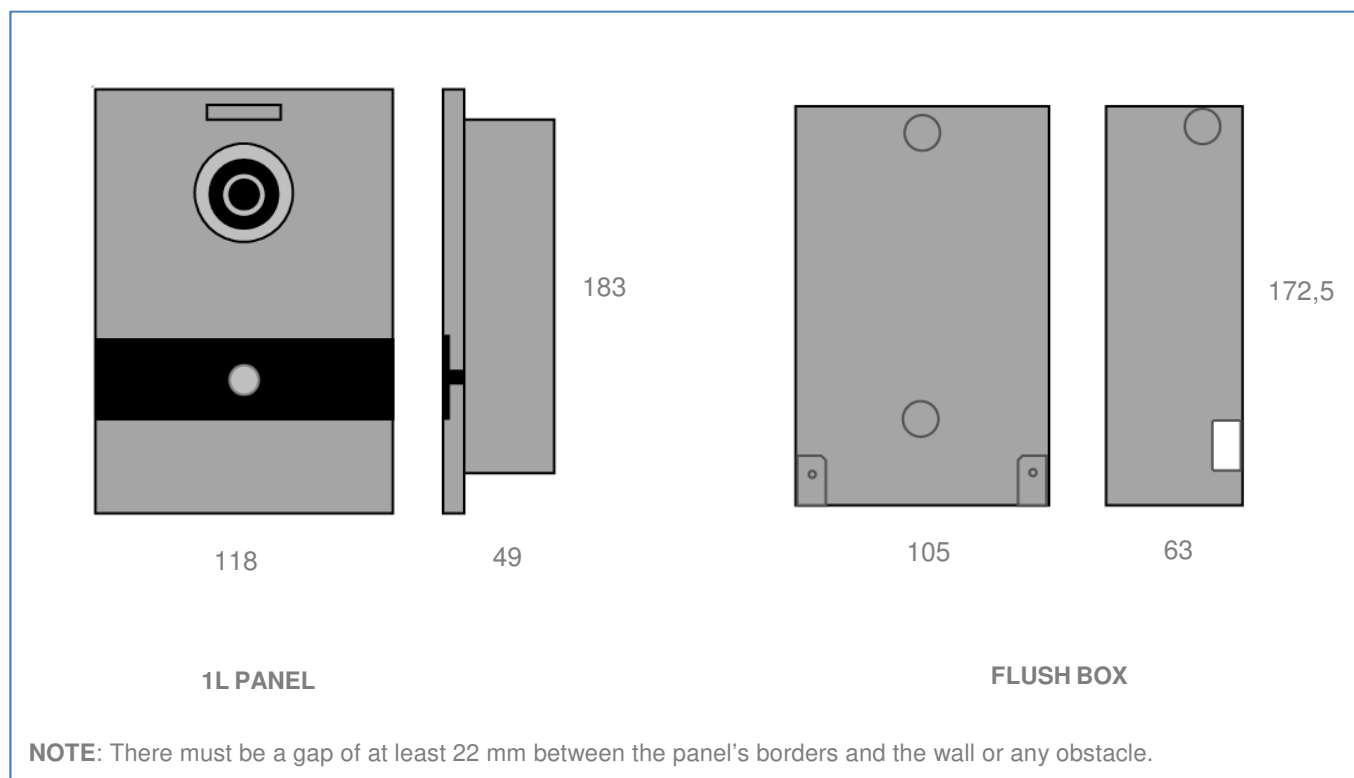

HEAD OFFICE

U1, 37-39 Green St,
Banksmeadow, NSW. 2019
p. 61 2 9700 1700
f. 61 2 9700 1955
sales@fermaxaus.com.au

QLD OFFICE

U11, 8 Fortitude Cres,
Burling Heads, QLD. 4220
p. 61 7 5520 2266
f. 61 7 5520 4591
qld@fermaxaus.com.au

VIC OFFICE

U30, 640-680 Geelong Rd,
Brooklyn, VIC. 3012
p. 61 3 9314 2220
f. 61 3 9314 7772
vic@fermaxaus.com.au


WA OFFICE

U2, 26 Gibberd Rd,
Balcatta, 6914
p. 61 8 9240 2624
wa@fermaxaus.com.au

NZ OFFICE

PO Box 112 110
Penrose, 1642
m. 64 27 566 0222
p. 64 9 337 6229
nz@fermaxnz.co.nz

CONNECTIONS

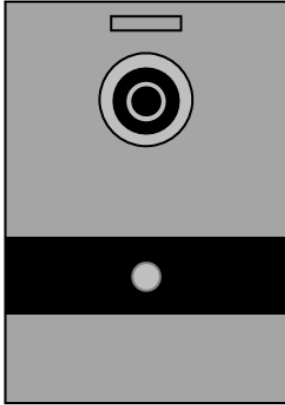

RJ-45 10/100 Base -T Ethernet
+, -, : 12 Vdc power supply input
BS, -, NA, SP: Exit button and door sensor connection
NO, C, NC: Door lock release connection
485+, 485-: RS485 serial port for spare

HEAD OFFICE

U1, 37-39 Green St,
Banksmeadow, NSW. 2019
p. 61 2 9700 1700
f. 61 2 9700 1955
sales@fermaxaus.com.au

QLD OFFICE

U11, 8 Fortitude Cres,
Burlleigh Heads, QLD. 4220
p. 61 7 5520 2266
f. 61 7 5520 4591
qld@fermaxaus.com.au

VIC OFFICE

U30, 640-680 Geelong Rd,
Brooklyn, VIC. 3012
p. 61 3 9314 2220
f. 61 3 9314 7772
vic@fermaxaus.com.au

WA OFFICE

U2, 26 Gibberd Rd,
Balcatta, 6914
p. 61 8 9240 2624
wa@fermaxaus.com.au

NZ OFFICE

PO Box 112 110
Penrose, 1642
m. 64 27 566 0222
p. 64 9 337 6229
nz@fermaxnz.co.nz